


UV Corrosion Control

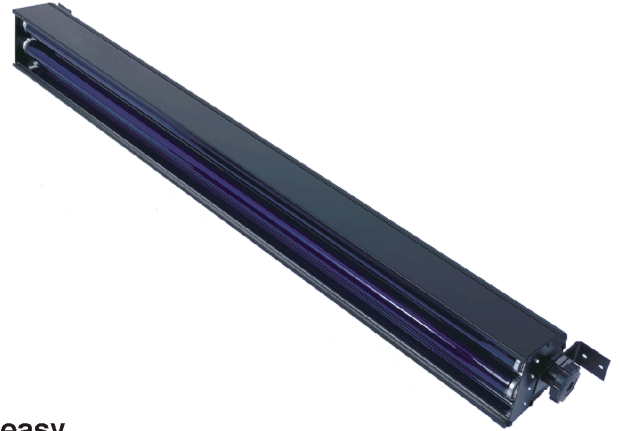

UV Corrosion Control's

Quick-Cure Series



UVCC-160T Quick-Cure

160 Watt Fluorescent Ultraviolet Curing Fixture

The UVCC-160T Quick-Cure is specially designed to be easy to use, safe and provide a fast cure for all our UV curable materials. The Quick-Cure model 160T offers an inexpensive alternative to our other high powered systems.

Features:

- Heavy-Duty Aluminum Housing
- Durable Black Powder Coat Finish
- High Output Electronic Ballasts
- Polished Everbrite Reflectors
- Positive Locking Sockets
- Adjustable Mounting Brackets
- Twin Lamp Design

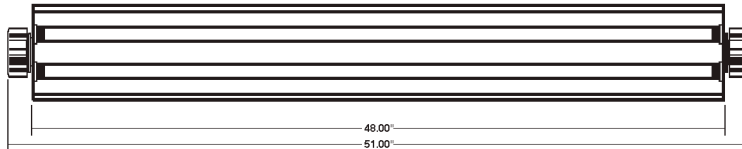

Specifications:

Ballast	Electronic, Power Factor > 98%
Rating	120 VAC / 50-60 Hz / 2.5A max.
Lamps	4', 40W Medium Bipin Rapid Start F40T(12)(10)(9)(8) (Super Saver or Energy Saver type lamps will not work in this fixture)
Lamp Wattage Output	160 Watts
Beam	Fixed 165°
Reflector	Polished Everbrite Aluminum
Lamp Life	8,000 to 10,000 Hours
Operating Temperature	50° F to 100° F
Weight	15lbs / 6.8kg

Standard Equipment:

- Adjustable Mounting Brackets
- 4' UVT Protective Lens Kit
- 4' 40W Medium Bipin Rapid Start UV-A Lamps

Options:

- Dual fixture bracket- allows attachment of two 160T fixtures together, lengthwise
- Telescoping 12' stand which will accept Dual Fixture Bracket allows 360 degree rotation

UV Corrosion Control